


	340AJ
Working height	12.33 m
Platform height	10.33 m
Horizontal Reach	6.06 m
Up and over height	5.17 m
Swing (not continuous)	355°
Platform capacity	230 kg
Platform rotator (hydraulic)	180°
Jib – overall length	1.22 m
Jib – range of articulation	139° (+79°/ -60°)
A. Platform size (W x L) standard platform	0.76 m x 1.52 m
Platform size (W x L) optional platform	0.76 m x 1.22 m
B. Overall width	1.93 m
C. Tailswing	5 cm
D1. Height (Stowed Position)	2.00 m
D2. Height (Storage Position)	2.17 m
E1. Length (Stowed Position)	5.52 m
E2. Length (Storage Position)	3.98 m
F. Wheelbase	1.87 m
G. Ground clearance	24 cm
Machine weight ¹	4,400 kg
Maximum ground bearing pressure	4.5 kg/cm ²
Drive speed – lowered	5 km/h
Drive speed – elevated	1 km/h
Turning radius (outside)	3.96 m
Turning radius (inside)	1.52 m
Gradeability	45%
Break-Over angle	45%
Tyres (choice of foam filled & non marking)	265/50 D20
Optional Tyres solid cushion (Flex type)	30 x 10 - 18FA
Axle Oscillation	15 cm
Diesel Engine – Kubota D1105	18.5 kW
Gas Engine – GM.97L	25.4 kW
Brakes – Spring applied, hydraulically released	On all 4 wheels
Fuel tank capacity	45 L
Hydraulic system	75 L

¹ Certain options or country standards may increase weight and/or dimensions.

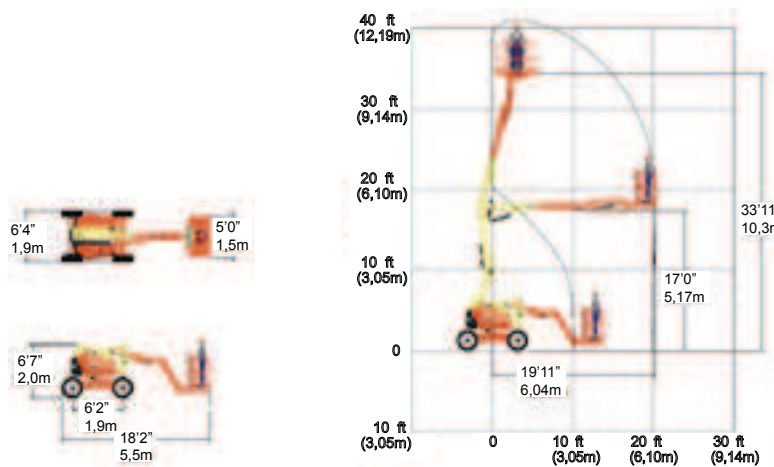

©2010, JLG Industries, Inc.

JLG is continually researching and developing products and reserves the right to make modifications without prior notice. All data in this document is indicative. Certain options or country standards will increase weight. Specifications may change to meet country standards or with the addition of optional equipment.

