


MEASUREMENTS	Metric	US
Platform Height	2900	A 9 ft 6 in
Entry Step	400	B 1 ft 3 in
Working Height	4900	C 16 ft
Platform Width	680	D 2 ft 2 in
Platform Length	1115	E 3 ft 9 in
Platform Length W/decks ext	1700	F 5 ft 6 in
Width	739	G 2 ft 4 in
Length Stowed	1192	H 3 ft 10 in
Height Stowed	1727	I 5 ft 7 in
Platform Capacity w/ decks ext	180 kg	397 lbs
Ground Clearance	35	1.4 in
Rated Number of Occupants 	1	
Rated Number of Occupants 	2	
PERFORMANCE		
Drive Speed Stowed	3 km/h	1.9 mph
Drive Speed Elevated	0,6 km/h	0.35 mph
Inside Turning Radius	Zero	Zero
Outside Turning Radius	1050	3 ft 5 in
Gradeability	35%	35%
Raise/Lower Speed	16 / 21 sec	16 / 21 sec
Controls	One Hand proportional controller	
Tires	Solid Rubber, Non Marking	
Front Wheel: diameter / width	200 / 70	8 / 2.8 in
Rear Wheel: diameter / width	300 / 90	12 / 3.6 in
POWER		
Power Source	110/220 V ca 24 V 12 Ah automatic	110/220 V ca 24 V 12 Ah automatic
Batteries	2 - 12V 85Ah	2 - 12V 85 Ah
Hydraulic System Capacity	20 lt	5.3 gal
Unit Weight 	508 kg	1120 lbs
Unit Weight 	550 kg	1212 lbs
STANDARD COMPLIANT	Ansi A92.6, CE Compliant, AS1418.10 (int)	

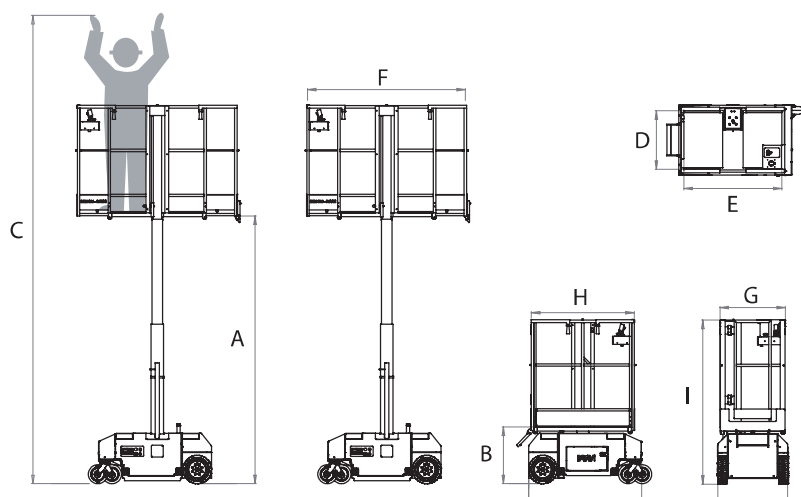